

Compact Printed Semicircular Disc Microstrip Line Fed Monopole Antennas for UWB Applications

Ramu Pillalamarri^{1,1)}, G Sasi Bhushana Rao² and S Srinivasa Kumar³

¹⁾Deputy Manager, Reliance Technology and Innovation Centre, Reliance Communications Ltd. India

^{1,3}Radio Frequency and Microwave Laboratory, Dept. of Electronics and Communication Engineering

Jawaharlal Nehru Technological University Kakinada, Andhra Pradesh, India

²Andhra University, Visakhapatnam, Andhra Pradesh, India

Corresponding Author: ramu06410230@gmail.com

Received October 10, 2009; accepted November 10, 2009

ABSTRACT

In this paper we have investigated compact printed semicircular disc monopole antenna, which is basically printed microstrip antenna with etched ground plane for UWB applications. In particular we have simulated very compact semicircular disc monopole antennas for UWB communication. Simple rectangular microstrip line is used for feeding the printed monopole antenna and its frequency bandwidth under -10dB return loss is ranging from 3GHz to 11.6 GHz. This compact printed monopole antenna works well for the whole UWB frequency band 3.1-10.6GHz.

Keywords: UWB, Semicircular, printed monopole antenna, Microstrip line.

1. Introduction

Ultra-Wideband (UWB) commonly refers to signal or system that either has a large relative bandwidth (BW) or a large absolute bandwidth [1]-[4]. Such a large BW offers specific advantages with respect to signal robustness, information content and/or implementation simplicity. But such systems have some fundamental differences from the conventional narrowband systems. The Federal communications Commission (FCC) has designated the 3.1 to 10.6 GHz band with Effective Isotropic Radiated Power (EIRP) below -40dbm/kHz for UWB Communications. Some UWB antennas are much more complex than other existing single band, dual band and multi-band antennas [5]-[6]. Most of the UWB monopole antennas are investigated till today is non-planar as in [7]-[8] and due to its protruded structure they cannot be integrated with integrated circuits and they are fragile. Few researchers have also studied printed monopole Antennas

In this paper, we will investigate UWB antenna, which is basically a printed microstrip antenna with etched ground plane. First we will investigate in depth the semicircular disk printed monopole antenna for UWB applications. For getting compactness, we have etched the half of the part of circular patch without disturbing

the bandwidth as well as antenna parameter. We have used conventional rectangular microstrip lines as feed lines for printed UWB antennas which are properly matched to the antenna impedance. In future we will also investigate other broadband matching techniques to further improve the UWB performance of the printed monopole antennas [9]-[11]. Ansoft High Frequency Structure Simulator (HFSS) simulation software has been employed for obtaining the simulation results.

2. Geometry of the UWB Monopole Antenna and the Simulation Results

I. Very Compact Semi-Circular UWB-Monopole Antenna

This modified UWB monopole antenna is designed directly from the circular disc UWB-Monopole antenna with some modifications in the patch shape as shown in Fig. 1(a). We have used the same FR4 substrate with 4.4 relative permittivity and 1.6 mm thickness. The real part of antenna impedance is exactly 50Ω at 8.5GHz and 10.8 GHz when the imaginary part of antenna impedance cross zero. The final optimal dimensions of the UWB-monopole antenna are:

Dimensions of Patch: Radius (r) = 12mm and metal thickness= 0.035mm.
Dimensions of Substrate: $W1 = 34$ mm and $L1 = 50$ mm. Dimensions of Ground: $W2 = 34$ mm and $L2 = 26$ mm.

Microstrip line: $W3=2.6$ mm and $L3=27.5$ mm. where “g” is gap between the ground plane and patch.

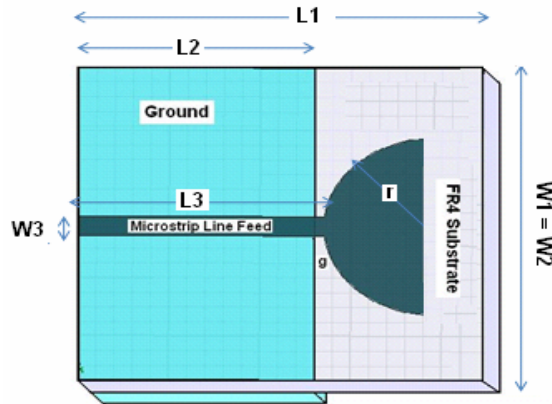


Fig. 1(a) Geometry of Semi-circular UWB Antenna

After doing an extensive simulation study, we have fixed the dimensions of UWB monopole antenna and the value of “g” as 1mm. The antenna impedance, f_{low} , f_{high} and radiation efficiency are tabulated in Table I. Note that proposed semicircular disc Monopole antenna is more compact and high efficient antenna for UWB applications. It has maximum directivity at -26° and -180° at 3 GHz and at the frequency 10.6 GHz, it has been tilted to 10° and -26.4° as frequency increases it is slightly tilted with 5° to 10° . The H-plane radiation pattern on the other hand is purely omni-directional pattern throughout the band of frequencies.

TABLE I : Parameters of the Semi-circular UWB Antenna

g mm	F_{low} GHz	F_{high} GHz	Antenna Impedance Ω	P_{acc} w	P_{rad} w	Max U W/Sr	Peak Gain	η %
0.8	3.2	11.5	50	0.98	0.88	0.13	1.69	89.6
1	3	11.6	50	0.97	0.87	0.13	1.64	89.3

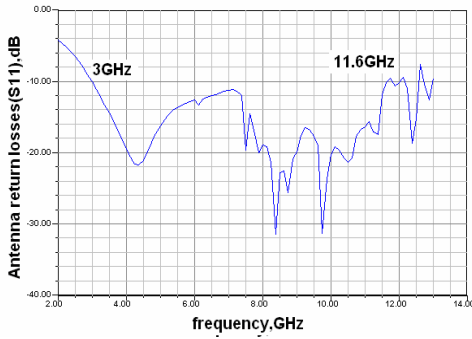


Fig. 1(b)

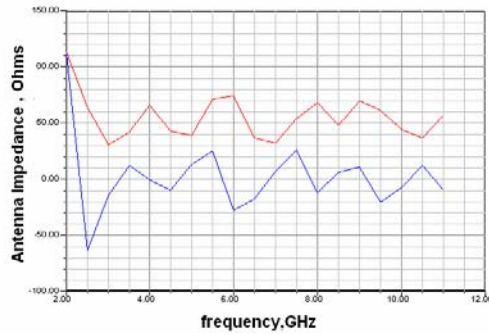


Fig. 1(c)

The simulated 3D radiation patterns of the proposed antenna at 3.1, 5, 8, 9, 10.6 and 11.2 GHz are shown in the Fig. 1(g). The radiation pattern looks like a doughnut, similar to that of a dipole pattern, at the first resonant frequency i.e. 3GHz. At the second resonant frequency i.e. at 5GHz and the third resonance frequency i.e. at 8GHz the radiation pattern is somewhat like pinched doughnut (i.e. omni directional). As the frequency moves toward the upper end of the bandwidth the radiation pattern is some what slightly distorted as it reaches higher frequencies (i.e.10.6GHz and 11.2 GHz.).

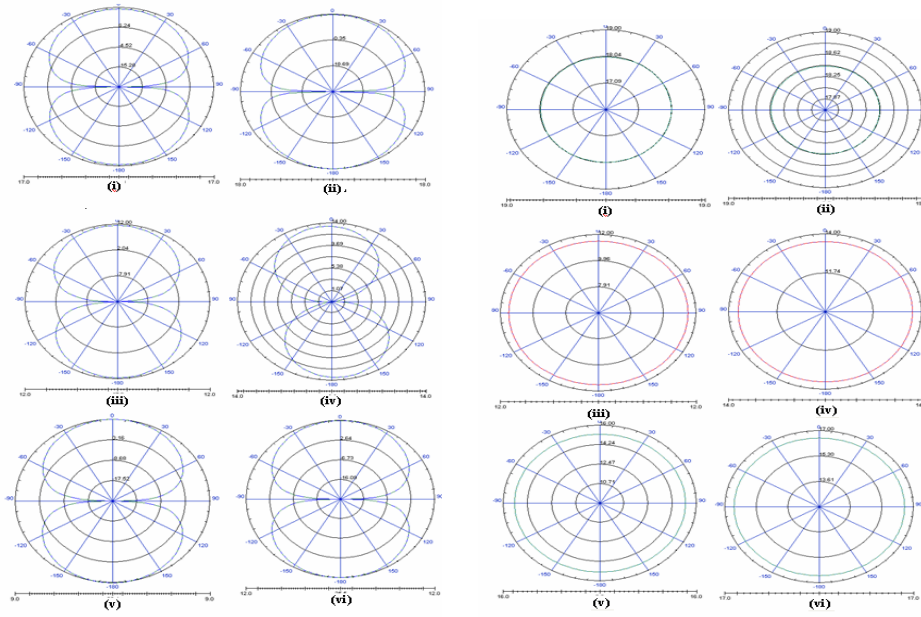


Fig. 1(d)

Fig. 1(e)

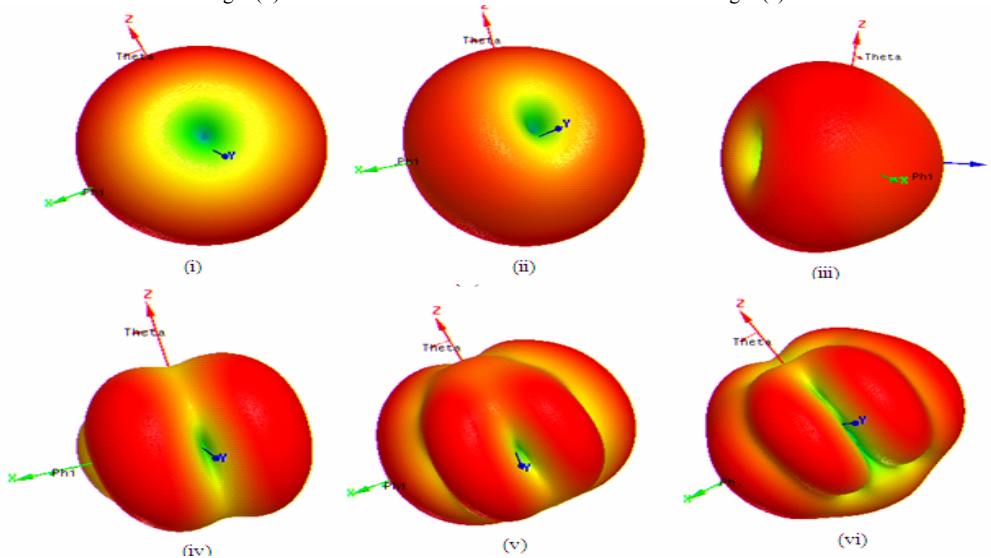


Fig. 1(f) 3D Radiation Plots at (i) 3.1 GHz, (ii) 5 GHz, (iii) 8 GHz, (iv) 9GHz, (v) 10.6 GHz and (vi) 11.2GHz

The transition of the radiation patterns from a simple doughnut at the lower frequencies to the slowly distorted radiation patterns at the higher resonances indicates that this antenna must have gone through major changes in its behavior but it had omni directionality, this was possible because of the partial ground plane i.e. ‘g’ the gap between the ground plane and the patch which was a major factor for perfect impedance matching of the antenna, due to the proper impedance matching

the antenna has very less reflections. As the impedance matching was good the radiation power and radiation intensity were very high.

3. Conclusion

In this paper, we have investigated printed semicircular disc UWB monopole antenna with huge bandwidth, which is basically a printed microstrip antenna with the etched ground plane. Printed UWB monopole antennas are less fragile, planar and can be integrated with the integrated circuits unlike monopole antennas which have non-planar or protruded structures above the ground plane. In particular, we have simulated very compact UWB monopole antenna and it has higher efficiency. The E-plane radiation the printed monopole antenna is in the form of 8 shapes and it is slightly tilted at higher frequencies. The H-plane radiation pattern has omni-directional patterns throughout the frequencies of the BW. It has been observed that such monopole antennas are suitable for UWB operations.

Acknowledgement

The First author is grateful to Dr. Kshetrimayum Rakesh Singh for introducing him design of broadband planar antennas for wireless and UWB Communication during his Postgraduate studies at the Indian Institute of Technology, Guwahati, India. As well as grateful to present Research guides, Dr. G Sasi Bhushana Rao, Andhra University, India and Prof. S Srinivasa Kumar, JNTU Kakinada, India, towards the Research Degree.

REFERENCES

1. H. Schantz, "The Art and Science of Ultra wideband Antennas", Artech House Inc., 2005.
2. G. R. Aiello and G. D. Rogerson, "Ultra-wideband Wireless Systems", *IEEE Microwave Magazine*, June, 2003, pp. 36-47.
3. B. Allen, M. Dohler, E. E. Okon, W. Q. Malik, A. K. Brown, D. J. Edwards "Ultra-Wideband Antennas and Propagation for Communications, Radar and Imaging", John Wiley & Sons, 2007.
4. D. M. Pozar, *Microwave Engineering*, John Wiley & Sons Inc., NJ, 2005
5. Ramu Pillalamarri and R. S. Kshetrimayum, "Printed UWB Circular and Modified Circular Disc Monopole Antennas," accepted for *IEEE Applied Electromagnetics Conference*, Kolkatta, India, December 2007.
6. R. S. Kshetrimayum and Ramu Pillalamarri, "UWB printed monopole antenna with a notch frequency for coexistence with IEEE 802.1a WLAN devices", in Proc. 5th National Conference on Communications (NCC) 2009.
7. Ramu Pillalamarri and R. S. Kshetrimayum "Single Printed Monopole Antenna and Notched Antenna with Triangular Tapered Feed Lines for Triband and Penta band Applications," in Proc. *IEEE Indicon 2007*, Bangalore, Sept. 2007.

8. Ramu Pillalamarri and R. S. Kshetrimayum "Accurate Determination of Antenna Impedance of Microstrip Line-Fed Patch Antennas," in Proc. *IEEE Indicon 2007*, Bangalore, Sept. 2007.
9. J. Liang, C. Chiau, X. Chen and J. Yu, "Study of a circular disc monopole antennas for ultra wideband applications", 2004 International Symposium on Antennas and Propagation, 17-21 August, 2004.
10. N. P. Agrawal, G. Kumar, and K. P. Ray, "Wide-Band Planar Monopole Antennas", *IEEE Transactions on Antennas and Propagation*, vol. 46, no. 2, February 1998, pp. 294-295.
11. M. Hammoud, P. Poey and F. Colombel, "Matching the Input Impedance of a Broadband Disc Monopole", *Electronics Letters*, vol. 29, no. 4, 18th February 1993, pp. 406-407.
12. Ansoft High Frequency Structure Simulator Corporation, UAS, V 9.0.